


■外形尺寸和印记 Outline Dimensions and Mark

DO-27

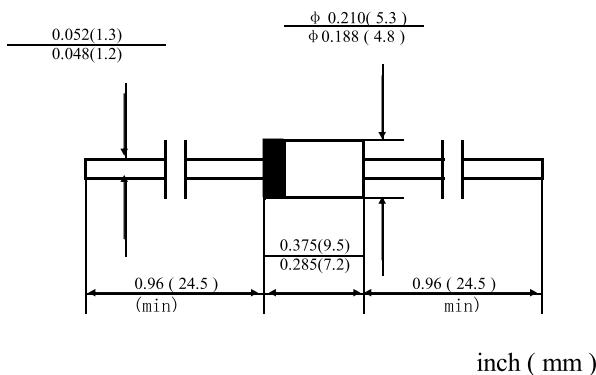

■特征 Features

- I_o 5.0A
- VRM 50V-600V
- 耐正向浪涌电流能力高
- High surge current capability

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

| 参数名称 Item | 符号 Symbol | 单位 Unit | 条件 Conditions | MUR | | | | | | | |
|---|--------------|------------|---|-----|-----|-----|-----|-----|-----|-----|------------|
| | | | | 505 | 510 | 515 | 520 | 530 | 540 | 550 | 560 |
| 反向重复峰值电压 Repetitive Peak Reverse Voltage | V_{RRM} | V | | 50 | 100 | 150 | 200 | 300 | 400 | 500 | 600 |
| 正向平均电流 Average Forward Current | $I_{F(AV)}$ | A | 正弦半波 60Hz, 电阻负载, $T_a=50^\circ C$ 60Hz Half-sine wave, Resistance load, $T_a=50^\circ C$ | | | | | | | | 5.0 |
| 正向(不重复)浪涌电流 Surge(Non-repetitive)Forward Current | I_{FSM} | A | 正弦半波 60Hz, 一个周期, $T_a=25^\circ C$ 60Hz Half-sine wave, 1 cycle, $T_a=25^\circ C$ | | | | | | | | 150 |
| 结温 Junction Temperature | T_J | °C | | | | | | | | | -55~+125 |
| 储存温度 Storage Temperature | T_{STG} | °C | | | | | | | | | -55 ~ +150 |

■电特性 ($T_a=25^\circ C$ 除非另有规定)Electrical Characteristics ($T_a=25^\circ C$ Unless otherwise specified)

| 参数名称 Item | 符号 Symbol | 单位 Unit | 测试条件 Test Condition | MUR | | | | | | | |
|--|------------------|------------|--|-------------------|-----|-----|-----|-----|-----|-----|-----|
| | | | | 505 | 510 | 515 | 520 | 530 | 540 | 550 | 560 |
| 正向峰值电压 Peak Forward Voltage | V_{FM} | V | $I_{FM}=5.0A$ | | | | | | | | |
| 反向峰值电流 Peak Reverse Current | I_{RRM1} | μA | $V_{RM}=V_{RRM}$ | $T_a=25^\circ C$ | | | | | | | 5 |
| | I_{RRM2} | | | $T_a=100^\circ C$ | | | | | | | 50 |
| 反向恢复时间 Reverse Recovery time | t_{rr} | ns | $I_F=0.5A$ $I_R=1A$ $I_{RR}=0.25A$ | | | | | | | | 35 |
| 热阻(典型) Thermal Resistance(Typical) | $R_{\theta J-A}$ | °C/W | 结和环境之间 Between junction and ambient | | | | | | | | 30 |
| | $R_{\theta J-L}$ | | 结和引线之间 Between junction and lead | | | | | | | | 10 |

■特性曲线(典型)

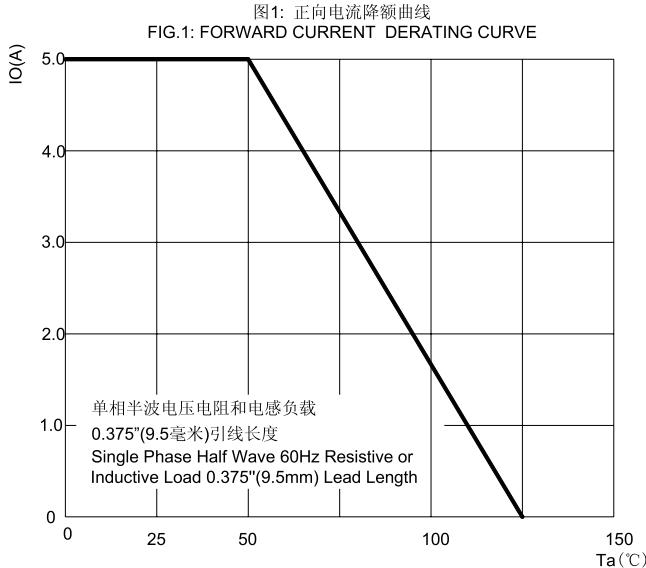


图2: 最大正向浪涌冲击耐受力
FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT



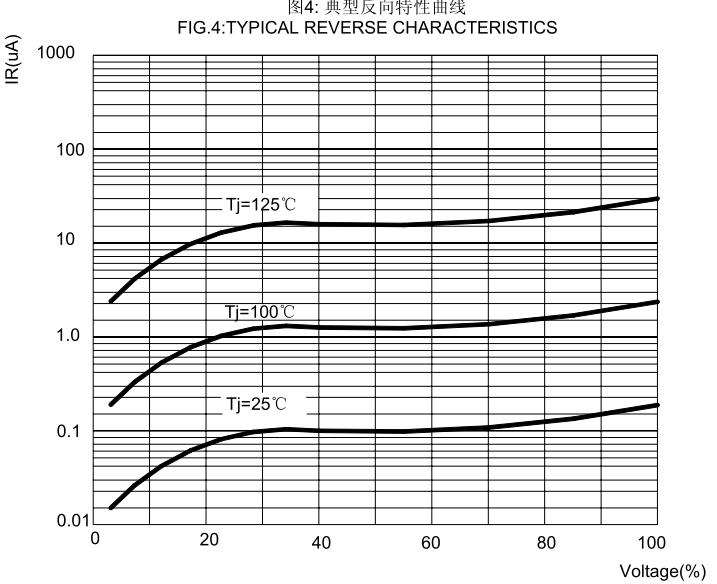


图5: 反向恢复时间试验电路及测试波形示意图
FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

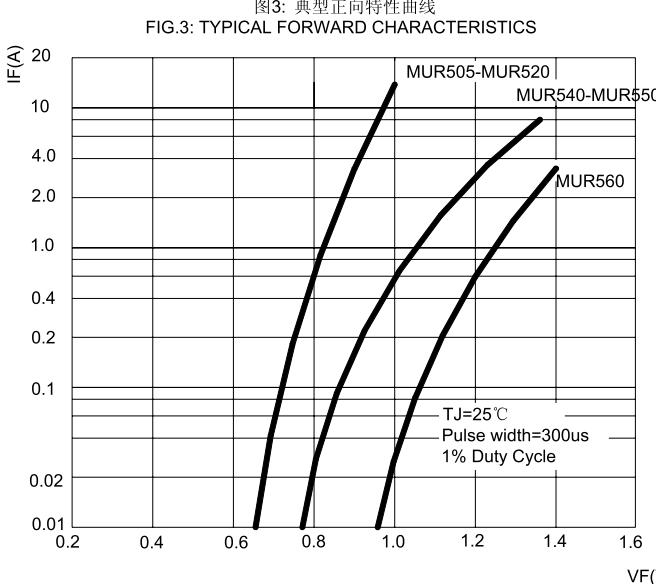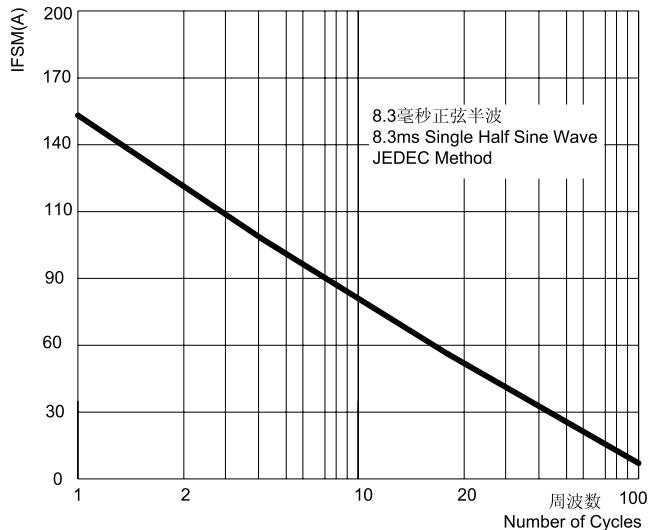